

# D5 EVO Sliding Gate Operators

High Speed Industrial operator with battery back up



The D5 EVO sliding gate operator is an innovative product designed for industrial applications which need a fast opening speed combined with an easy to program LCD control panel.

Battery back up is a standard feature of the D5 EVO, this gives peace of mind during storms or other power failure situations and solar panel kits are available.

The D5 EVO is the fastest operator in this class, at 22 metres per minute (366 mm/sec) it will open a 6 metre gate in 16 seconds.

The opening and closing speeds as well as the ramp up/ramp down are independently adjustable. This means that you can have your gate opening at full speed and closing at a slower rate, this will help reduce accidents and damage to the gate.



D5 Gate Rack

The HD heavy duty steel reinforced rack is supplied in 1m lengths 6 point fixing (legs down) and is suitable for gates weighing up to 1000Kgs.




D5 Control Panel

The control panel allows the installer a quick and easy way to program numerous functions simply by clicking through the intuitive menu.

The many options available include control of pillar lights, gate operating modes, a seven day timer to time bar or activate physical inputs and individual radio transmitters. This can be used to give people access during the working day but not at week ends or after hours.

A rolling code high security Nova radio receiver is built into the control panel. Two 4 button transmitters are supplied with the operator and they can be used to operate any of the system inputs. Individual transmitters can be added or deleted from the receiver memory.

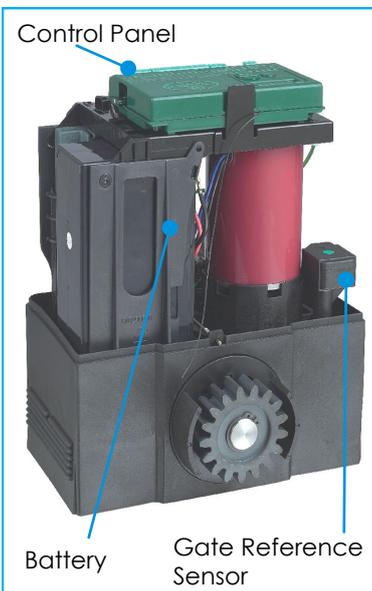

Control Panel

Battery

Gate Reference Sensor

Safety sensing and control of the open and closed position is provided through the DOS operating system that has been in use for more than 10 years on previous models.


The control panel is fully sealed to prevent ingress of dirt and insects.

The diagnostic LCD display aids fault finding while the control panel monitors safety circuits to ensure correct and safe operation of the gate operator.

## Technical Specifications

Sliding Gate Operator	D5 EVO
Warranty	24 Months
Input Voltage	220V + - 10%, 50Hz
Motor Voltage	12vdc
Current consumption (Mains)	170mA
Gate Mass - Maximum	500kg
Gate Length - Maximum	20m
Operator push force - starting	30kgf
Operator push force - rated	20kgf
Gate Speed	22 m/min (366 mm/sec)
Operations per day - Maximum	150
Operating temperature range	-15°C to + 50°C
Mass of unit packed	11kg

## Dimensions

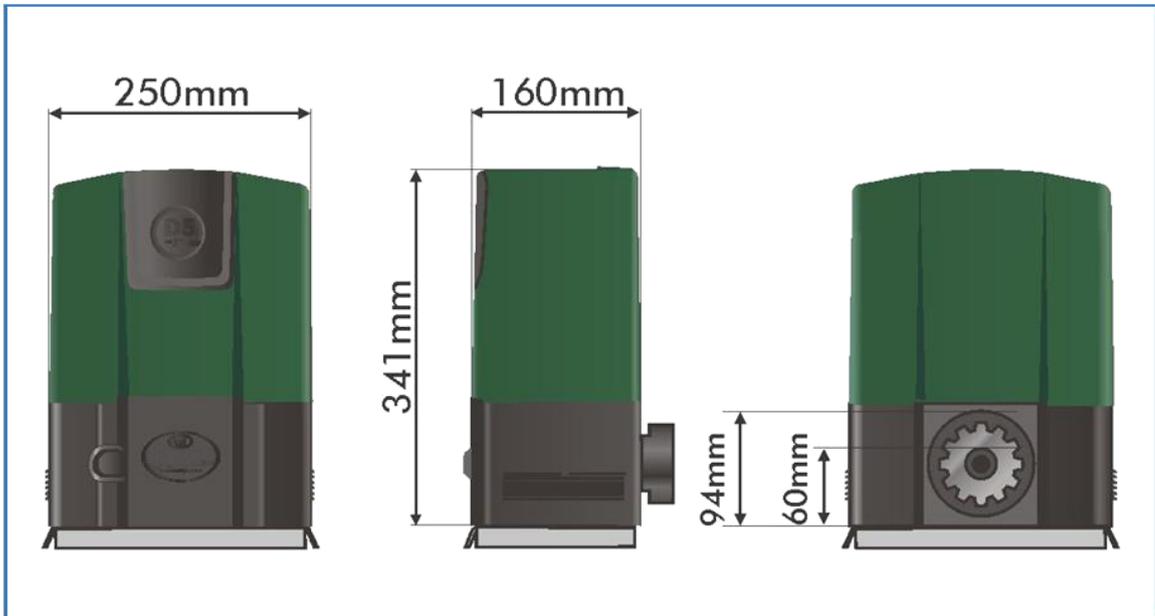

Rotech supply all forms of door and gate automation

### Vehicle Access Control

- Booms Gates
- Sliding Gates
- Swing Gates
- Industrial Door Openers
- Solar Powered Gate Openers

### Pedestrian Access Control

- Full Height Turnstiles
- Waist Height Turnstiles
- Supermarket Gates/Turnstiles
- Wheelchair Access Gates
- Rapid Access Gates

**Fast | Safe | Secure**

For more information: t: +61 07 3205 1123 | [www.rotech.com.au](http://www.rotech.com.au) | e: [info@rotech.com.au](mailto:info@rotech.com.au)

V0413