
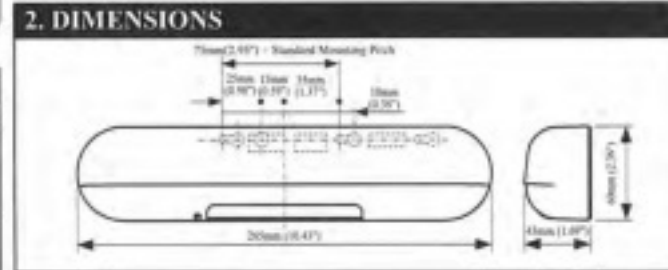


COMPLIED STANDARDS
DIN18650-1:2005
EN 12978:2003 +A1:2009
AutSchR:1997
EN16005:2012
EC type examination
44 205 12 414283-001

WARNING Disregarding this symbol may result in serious injury or death
CAUTION Disregarding this symbol may result in injury or damage to equipment
Note Special attention is required when this symbol is shown
EN16005 Setting required to conform with EN16005

Combined motion and presence detection sensor for escape route doors

1. DESCRIPTION

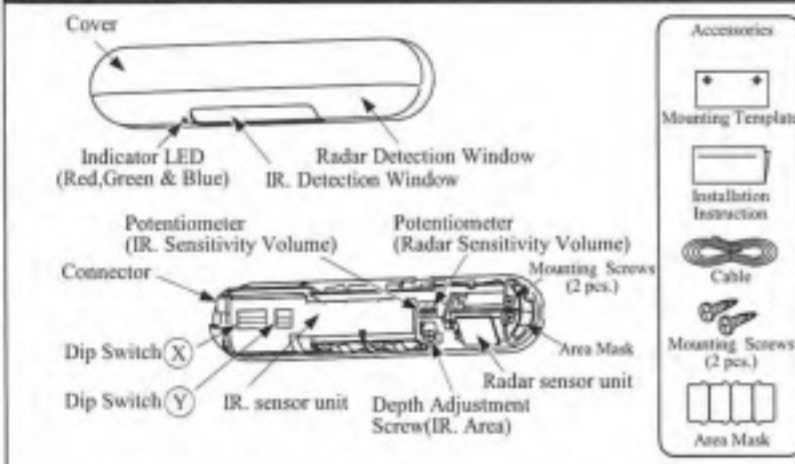

3. LED INDICATORS


Green	Standby
Green blinking	Doorway Learning (When Dip Switch Y 5 is ON)
Blue	RADAR Detecting
Red	IR. Detecting / RADAR and IR. Detecting
Orange	Detection row "ROW1"/"ROW2" when doorway Learning is turned ON) is detecting door movement
Orange blinking (Fast)	Indicates a change of Dip Switch settings
Orange blinking (Slow)	Door Hold is turned ON (When Dip Switch Y 4 is ON)
Green/Red blinking (Fast)	Abnormal Sensor Error
Green/Red blinking (Slow)	Reflected infrared signal from the floor is very low

5. TECHNICAL SPECIFICATIONS

Common Specification	
Model Name	SSR-3V, SSR-3P
Installation Height	3.2m (10.5 ft) Max. EN16005 Conformity = 3m
Supply Voltage	AC/DC 12 to 24 [V] ±10% 50/60Hz
Power Consumption	AC12V-2.5 [VA] (Max) AC24V-2.5 [VA] (Max) DC12V-150 [mA] (Max) DC24V-80 [mA] (Max)
IR	Open collector: 7.5 [mA] (Max) Resistor Load Opto coupler (NPN) Voltage: 55 [VDC] Max. Current: 50 [mA] Max. Dark Current: 100 [nA] Max. (Resistance load)
Output	SSR-3V: Voltage output: Min 3.2[VDC] at 10[mA] Open circuit voltage: Max 2[VDC] (No load) SSR-3P: Pulse output: Opto coupler (NPN) Voltage: 55 [VDC] Max. Current: 50 [mA] Max. Dark Current: 100 [nA] Max. (Resistance load)
Test Input	6 [mA] Max. at 24 [VDC]
Operating Temperature	-20 to +60 [Deg.C] (-4 to 140 [Deg.F])
Operating Humidity	Below 85%
IP Rate	IP54
Category	Cat.3-PL, d(IR), Cat.3-PL, d(Radar) according to EN ISO 15849-1:2008
Weight	0.56 [kg] (0.26 [kg])
Color	Black, Silver
Accessories	Cable, Mounting Screw 2 pcs., Mounting Template, Installation Instruction
Specifications of Reflection Sensor	
Detection Method	Active Infrared Reflective
Output Holding Time	0.5 [seconds] App.
Response Time	0.1 ~ 0.2 [seconds]
Presence Timer	3, 30, 60 [seconds] or ∞
Specifications of Radar Sensor	
Detection Method	Doppler method (moving body detection)
Response Time	0.1 ~ 0.2 [seconds]
Transmit Frequency	24.15 [GHz]
Output Holding Time	1.5 [seconds] App.
Response Time	0.1 ~ 0.2 [seconds]

Notice: Specifications may be changed without prior notice.

4. MOUNTING PRECAUTIONS

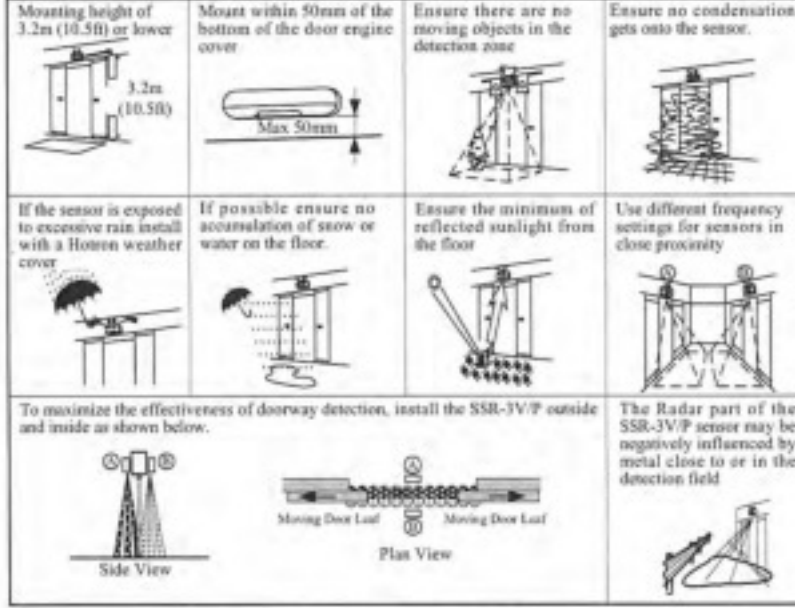

6. MOUNTING & WIRING INFORMATION

WARNING Drilling may cause electric shock. Be careful of hidden wires inside the door engine cover.

- Attach the mounting template so that its bottom edge is flush with the bottom edge of the door engine cover.
- Drill mounting (3.5mm φ) and wiring (10mm φ) holes.
- Remove the sensor cover as illustrated. Lift the sensor from its cover.
- Attach the sensor with the mounting screws provided.

5-1 Wiring to a door controller that can test the sensor

SSR-3V	SSR-3P
Power (Non Pole): AC/DC 12 to 24 [V] ±10% → Red	Power (Non Pole): AC/DC 12 to 24 [V] ±10% → Red
Activation Output: Collector → White, Emitter → Green	Activation Output: Collector → White, Emitter → Green
Safety Output: Collector → Yellow(+), Emitter → Blue(-)	Safety Output: Collector → Yellow(+), Emitter → Blue(-)
Test Input: Test-P → Gray(+), Test-N → Brown(-)	Test Input: Test-P → Gray(+), Test-N → Brown(-)

5-2 Wiring to a door controller that cannot test the sensor

SSR-3V	SSR-3P
Power (Non Pole): AC/DC 12 to 24 [V] ±10% → Red	Power (Non Pole): AC/DC 12 to 24 [V] ±10% → Red
Activation Output: Collector → White, Emitter → Green	Activation Output: Collector → White, Emitter → Green
Safety Output: Collector → Yellow(+), Emitter → Blue(-)	Safety Output: Collector → Yellow(+), Emitter → Blue(-)
do not connect → Gray	do not connect → Gray
do not connect → Brown	do not connect → Brown

6. House connectors in the space provided. 7. Replace Cover. 8. Removing the cover after installation.

7. DIP SWITCH SETTINGS

CAUTION

Dip Switch X (1-7) and Dip Switch Y (1-5)

Function	Dip Switch X	Description	Possible Setting Options
IR. Presence Timer	☆ 30s (1, 2)	The sensor will detect a stationary object for the preset presence timer setting on the inner 3 rows. EN16005 To comply with EN16005 set the presence timer to 30s or more	2s (1, 2), ☆ 30s (1, 2), 60s (1, 2), ∞ (1, 2)
IR. Frequency	☆ A (3, 4)	When more than two sensors are installed in close proximity to each other select different frequency settings for each sensor to prevent cross interference.	☆ A (3, 4), B (3, 4), C (3, 4), D (3, 4)
Monitor Mode	☆ Normal (5)	Set to show in instances where false door activations can result from blowing snow, leaves or rubbish in the door close area.	☆ Normal (5), Snow (5)
Safety Output	☆ N.O. (6)	Refer to [11. Timing Chart of events] for full details on Safety Output	☆ N.O. (6), Safety Output (Opto-Coupler), N.C. (6)
Reflection Diagnostics	☆ Normal (7)	A low reflected infrared signal is indicated by a slow flashing Red/Green LED. To ignore this low reflection error state, set this Dip Switch to "Low Reflection" (ON). EN16005 To comply with EN16005 set to "Normal"	☆ Normal (7), Low Ref. (7), IR Spot (7)

Function	Dip Switch Y	Description	Possible Setting Options
Direction Detection RADAR	☆ ON (1)	When set to ON, pedestrians moving away from the sensor will not be detected.	OFF (1), ☆ ON (1)
Reserve	☆ OFF (2)	Keep OFF	☆ OFF (2)
Activation Output	☆ OFF (3)	Choose how activation output is configured.	☆ OFF (3), RADAR + IR rows 2-3 (3), ON (3), RADAR (3)
Door Hold	☆ OFF (4)	Switch to OPEN to hold the door in the open position. CAUTION	☆ Auto (4), Open (4)
Doorway Learn	☆ OFF (5)	Doorway Learn allows the 1st row of detection to be focused inside the door close area without the detecting door movement. Note When Doorway Learn is turned ON, the sensitivity level of the inner row of detection is only at maximum when the outer rows of detection are activated.	☆ OFF (5), Door (5), ON (5)
Test Input Setting from Door Controller	☆ OFF (6)	When connected to a door controller without a TEST input, set to "OFF". When connected to a door controller with a TEST input, set to "ON". Refer to [11. Timing Chart of events]. EN16005 Set to "ON" to comply with EN16005	☆ OFF (6), Without TEST, With TEST, OFF (6), ON (6)

8. DETECTION

EN16005 Verify that the detection area position conforms to EN16005 by using the Hotron Beam Finder

Detection Area Depth Adjustment: IR. (Inner 3 Rows)

Detection Area Width Adjustment: IR. (Inner 3 Rows)

Detection Area Depth Adjustment: RADAR (Outer)

● Detection area varies depending on walking speed
● Adjustment possible in 1° steps as illustrated

CAUTION The above illustrated detection areas represent the actual position of the infrared and radar beams. The actual detection area observed will vary depending on the sensor installation environment, object been detected and sensor settings. Please ensure that the detection area is set to conform to EN16005

9. APPLYING POWER AND THE "DOORWAY LEARN" SETTING

"Doorway Learn" is OFF
Ref section 7, Dip Switch Settings.

Upon power ON, the solid green LED turns on indicating that the sensor is in standby mode and ready to detect.

Presence Detection: It takes 10s after sensor power up for presence detection to be initiated on all rows of detection. If before 10s has elapsed someone walks into the detection area it will take about 5s after the person leaves the detection zone for presence detection to be functional.

"Doorway Learn" is ON
Ref section 7, Dip Switch Settings.

Upon power ON, the Red LED indicates a door open relay output to begin the doorway learn process.

Green LED blinks for 37s as the "door learn" process is carried out. Door opens/closes.

Door learn process complete, sensor in standby mode.

Presence Detection: During the "Doorway Learn" process the outer 3 rows of detection on the SSR-3V/P sensor switch from motion detection to presence detection 10s after power ON. The inner "door learn" row of detection will switch from motion to presence detection after the "doorway learn" process is carried out.

"Doorway Learn" Failure & Recovery: If a person enters the detection area during the "doorway learn" process it may not be successfully completed. In this case the sensor will carry out the doorway learn process over three door activations by a person in order to build an accurate image of the door open and door close position.

CAUTION When Doorway Learn is turned ON, the sensitivity level of the inner row of detection is only at maximum when the outer rows of detection are activated.

Note When Doorway Learn is turned ON, the sensitivity level of the inner row of detection is only at maximum when the outer rows of detection are activated.

General Caution:
When carrying out the following work, turn off sensor power.
 ☞ When the floor condition is changed by placing a mat on the floor etc.
 ☞ When the detection area pattern or sensor sensitivity is adjusted.

10. VERIFICATION OF OPERATION

After installation is completed "walk test" the sensor detection area. If the detection area is not as expected adjust the detection area as referred to in section 8.

If the detection area is still not as expected then the sensor sensitivity can be increased by turning the potentiometer clockwise. When the sensor detects even though there is nothing in the detection area the sensor sensitivity can be decreased by turning the potentiometer in the anti-clockwise direction.

IR Sensitivity

RADAR Sensitivity

11. TIMING CHART OF EVENTS

Safety Output / Test Input

Dip Switch (X) Safety Output

POWER OFF	NON-DETECTION	DETECTION	NON-DETECTION
N.O. Yellow Blue	N.O. Yellow Blue	N.O. Yellow Blue	N.O. Yellow Blue
N.C. Yellow Blue	N.C. Yellow Blue	N.C. Yellow Blue	N.C. Yellow Blue

6

TEST RESPONSE

Test Input

NON-TEST	TEST	NON-TEST
Break the current	Gray Sensor Brown	Gray Sensor Brown
Supplying DC12 to 24V, make current flow from Gray to Brown.	Gray Sensor Brown	Gray Sensor Brown

Dip Switch (Y) Test Input setting

OFF

ON

6

T1: 10 ± 1 [mSec] App
T2: 11 ± 1 [mSec] App

11. TIMING CHART OF EVENTS (Continued)

Activation Output

Dip Switch (Y)-3 ON

POWER OFF	NON-DETECTION	DETECTION
SSR-3V Voltage Output Model	White Green	White Green
SSR-3P Pulse Output Model	White Green	White Green

Dip Switch (Y)-3 OFF

POWER OFF	NON-DETECTION	DETECTION
SSR-3V Voltage Output Model	White Green	White Green
SSR-3P Pulse Output Model	White Green	White Green

12. DOOR MAINTENANCE WORK

When carrying out door maintenance work with power applied to the sensor on door controllers that are wired to "test" the sensor ensure to set the Dip Switches as below.

Note remember to return the Dip Switch settings to their original state once door maintenance work has been carried out.

Refer to [7.Dip Switch Settings].

13. SELF DIAGNOSTICS ERRORS

Technical problems with the SSR-3V/P sensor are indicated by a flashing Green/Red LED. The frequency of flashing indicates the type of problem as explained below.

Flash Frequency	LED	Cause
Fast	Green Red	Please replace the sensor.
Slow	Green Red	Confirm that the sensitivity potentiometer is set to maximum and re-power the sensor. If the error persists, set Dip Switch (X)7 to "Low Reflection".

14. TROUBLESHOOTING

Problem	LED Status	Possible Cause	Solution	
Door does not open when a person enters the detection area	OFF	Sensor Connector not connected correctly	Tighten or reconnect the connector.	
		Incorrect power supply voltage	Apply proper voltage to the sensor. (AC/DC 12-24V)	
		Incorrect sensor wiring	Double check sensor wiring	
Door opens and closes for no apparent reason (Ghosting)	Door Opens RED or BLUE Door Closes GREEN	Object moving in the detection area	Remove the moving object from detection area.	
		Sensitivity too high for the installation environment	Reduce the sensor sensitivity setting	
		Dust, frost or water droplet on the sensor lens	Wipe the sensor lens clean and install a weather cover if necessary	
		Detection area overlaps with that of another sensor	Ensure different frequency setting for each sensor, and adjust to overlap the radar area using the angle and volume.	
		Detection of falling snow, insects, leaves etc	Turn monitor mode Dip switch (X)5 to "snow"	
		When Door opens or closes, LED ORANGE	ORANGE	Detection row "ROW1" ("ROW2" when "Doorway Learn" is turned ON) is focused too close to the door.
Door opens and remains in the open position	RED	Detection area changed, while ∞ infinity presence timer setting is in use	Re-power the sensor or change the presence timer settings to 30 or 60 sec	
		Incorrect sensor wiring	Double check sensor wiring	
		Reflected signal saturation	Remove highly reflective objects from the detection area, or lower the sensor sensitivity setting	
		BLUE	Moving objects in the radar area	Eliminate moving objects
		GREEN/RED FAST FLASH	Internal sensor error	Replace the sensor
		GREEN/RED SLOW FLASH	Reflection of the transmitted infrared signal from the floor is too low	Increase sensor sensitivity or change the "Reflection Diagnostics" Dip switch (X)7 from "Normal" to "Low Ref"
ORANGE blinking (Slow)	Door Hold (Dip switch (Y)4 set to Open)	Turn OFF the "Door Hold" Dip switch (Y)4 to Auto		

15. SSR-3V,SSR-3P EC DECLARATION OF CONFORMITY

Compiler of Technical File (EC Community) David Morgan Horton Ireland Ltd 26 Dublin Street, Carlow, Ireland Ph: +353 5991 40345 Fax: +353 5991 40543		Description of Product: SSR-3V,SSR-3P Combined motion and presence detection sensor for the activation and safety of automatic doors. Technology used is Active Infrared Technology and Doppler method (moving body detection) Technology.	
Directives Fulfilled: DIRECTIVE 2006/42/EC DIN 18650-1:2005 Powered pedestrian doors Part 1: Product requirements chapter 5.7.4 EN12978:2003 Industrial, commercial and garage doors and gates - safety devices for power operated doors and gates - Requirements and test methods. EN62061:2005 Functional safety of electrical/electronic/programmable electronic safety-related systems. EN ISO 13849-1:2008 Safety of machinery - Safety-related parts of control systems. AufSchr:1997 EN 16005:2012 EC type examination 44 205 12 414283-001			
Above EC Type Directives Certified by: TÜV NORD CERT GmbH 30519 Hannover Germany Identification No: 0044		Harmonized Standards Used: EN ISO 13849-1:2008	
Other Technical Standards Used: DIN 18650-1:2005 EN16005:2012		Location of Declaration (Manufacture): Honda Electron Co. Ltd 1-23-19 Asahi-Cho,Machida-City, Tokyo, Japan	
Declaration made by: Kaoru Mutsya General Manager		Date: 10th xxxx,2012	

< Disclaimer > The manufacturer cannot be held responsible for below.

- Misinterpretation of the installation instructions, miss connection, negligence, sensor modification and inappropriate installation.
- Damage caused by inappropriate transportation.
- Accidents or damages caused by fire, pollution, abnormal voltage, earthquake, thunderstorm, wind, floods and other acts of providence.
- Losses of business profits, business interruptions, business information losses and other financial losses caused by using the sensor or malfunction of the sensor.
- Amount of compensation beyond selling price in all cases.



For More Information - Tel: +61 7 3205 1123 Email: info@rotech.com.au Web: www.rotech.com.au